FIRETS
FRTS 法瑞测试设备

Field-Smoke-Meter

In-situ Smoke Obscuration Measurement System

In-situ Smoke Obscuration Measurement System

FIELD FIRE TEST / OPTICAL OBSCURATION

Measure optical smoke response across the test space.

Provide in-situ optical measurements for large-scale fire and smoke-extraction research. Transmitter and receiver units are installed at opposite ends of a defined path, linking changing light transmission with other temperature or velocity measurements.

Principle

Received light is compared with a clean-air baseline.

System

Transmitter, receiver, adjustable rigid supports and acquisition software, with protection and maintenance arrangements matched to the.

Application

Large test facilities, smoke movement studies and project-specific field measurement paths.



Original equipment photograph. Appearance only.

Sichuan Farui Testing Equipment Co., Ltd.

01 / PRODUCT / APPLICATION

Product purpose and selection

Provide in-situ optical measurements for large-scale fire and smoke-extraction research. Transmitter and receiver units are installed at opposite ends of a defined path, linking changing light transmission with other temperature or velocity measurements.



Original equipment photograph. Appearance only.

OPTICAL MEASUREMENT PRINCIPLE

Measurement principle

Received light is compared with a clean-air baseline.



Original equipment photograph. Appearance only.

Measurement principle

Received light is compared with a clean-air baseline. The measured transmission and actual path length support extinction-related data, subject to alignment, window condition and background-light control.

Use in the laboratory

Transmitter, receiver, adjustable rigid supports and acquisition software, with protection and maintenance arrangements matched to the thermal environment.

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

FIELD ARRANGEMENT

Setup

Provide in-situ optical measurements for large-scale fire and smoke-extraction research.

01 Setup

Provide in-situ optical measurements for large-scale fire and smoke-extraction research. Transmitter and receiver units are installed at opposite ends of a defined path, linking changing light transmission with other temperature or velocity measurements.

02 Use in the laboratory

Keep the clean-air baseline, path length, alignment and window-condition record. Retain raw light or transmission values and document treatment of background light, saturation and obstruction.



Original equipment photograph. Appearance only.

04 / FIELD ARRANGEMENT

Setup · continued

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

BASELINE AND QUALITY CHECKS

Baseline


Transmitter, receiver, adjustable rigid supports and acquisition software, with protection and maintenance arrangements matched to the thermal environment.

01 Baseline

Transmitter, receiver, adjustable rigid supports and acquisition software, with protection and maintenance arrangements matched to the thermal environment.

02 Use in the laboratory

Keep the clean-air baseline, path length, alignment and window-condition record. Retain raw light or transmission values and document treatment of background light, saturation and obstruction.

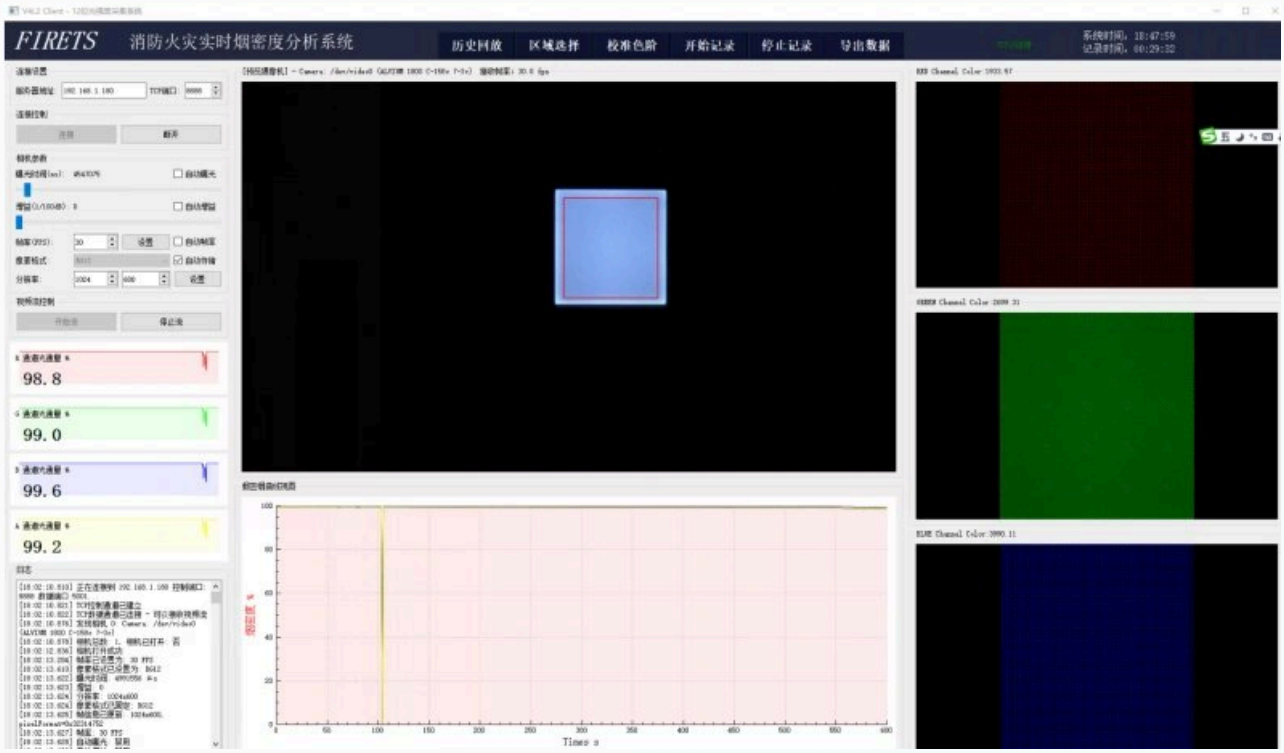

Original software screenshot. Displayed values are examples, not certified results.

06 / BASELINE AND QUALITY CHECKS

Baseline · continued

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

FIELD TEST WORKFLOW

Test sequence

Received light is compared with a clean-air baseline.

01 Test sequence

Received light is compared with a clean-air baseline. The measured transmission and actual path length support extinction-related data, subject to alignment, window condition and background-light control.

02 Use in the laboratory


Keep the clean-air baseline, path length, alignment and window-condition record. Retain raw light or transmission values and document treatment of background light, saturation and obstruction.



Original equipment photograph. Appearance only.

08 / FIELD TEST WORKFLOW

Test sequence · continued

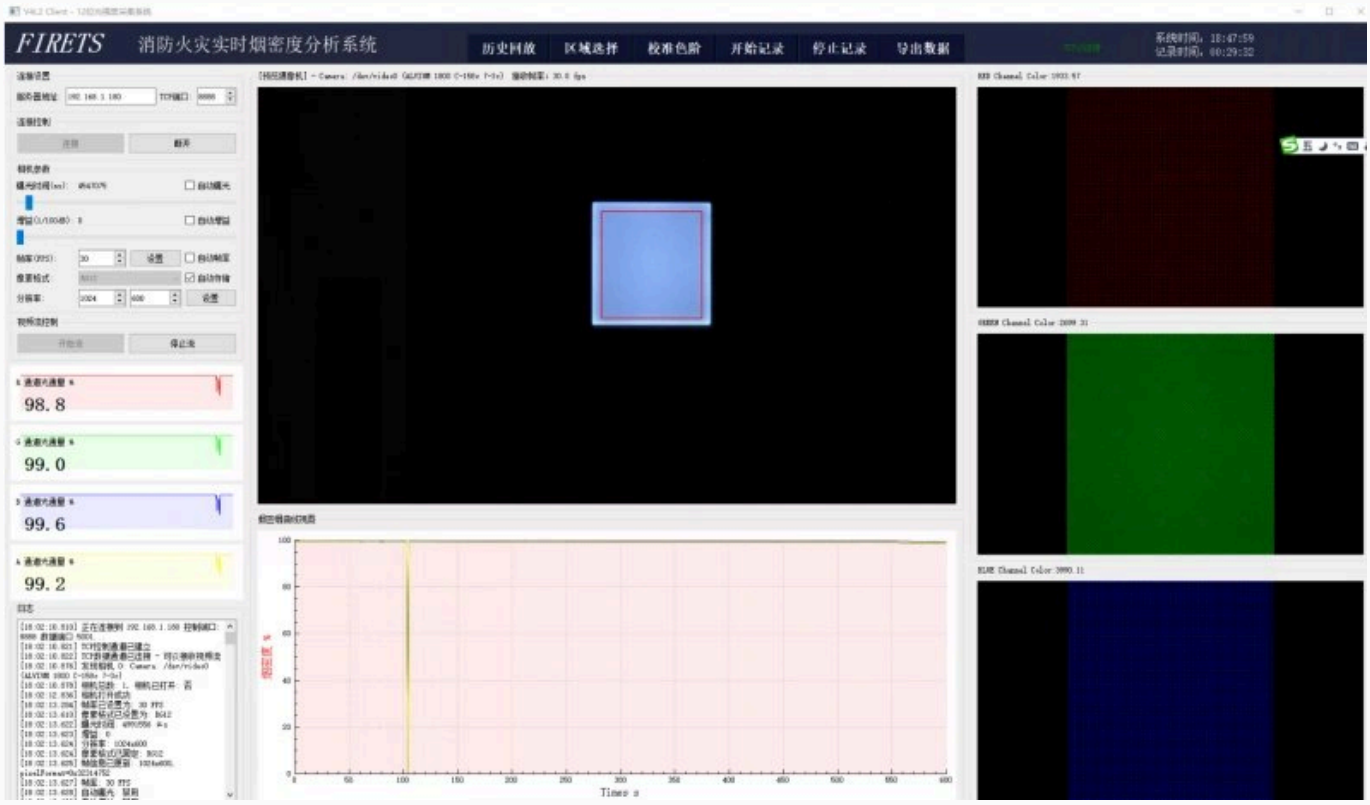

Original software screenshot. Displayed values are examples, not certified results.

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

MEASURED QUANTITIES

Quantities

Provide in-situ optical measurements for large-scale fire and smoke-extraction research.

01 Quantities

Provide in-situ optical measurements for large-scale fire and smoke-extraction research. Transmitter and receiver units are installed at opposite ends of a defined path, linking changing light transmission with other temperature or velocity measurements.

02 Use in the laboratory


Keep the clean-air baseline, path length, alignment and window-condition record. Retain raw light or transmission values and document treatment of background light, saturation and obstruction.

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

VERIFIED SOFTWARE VIEW

Control software and records

Keep the clean-air baseline, path length, alignment and window-condition record.

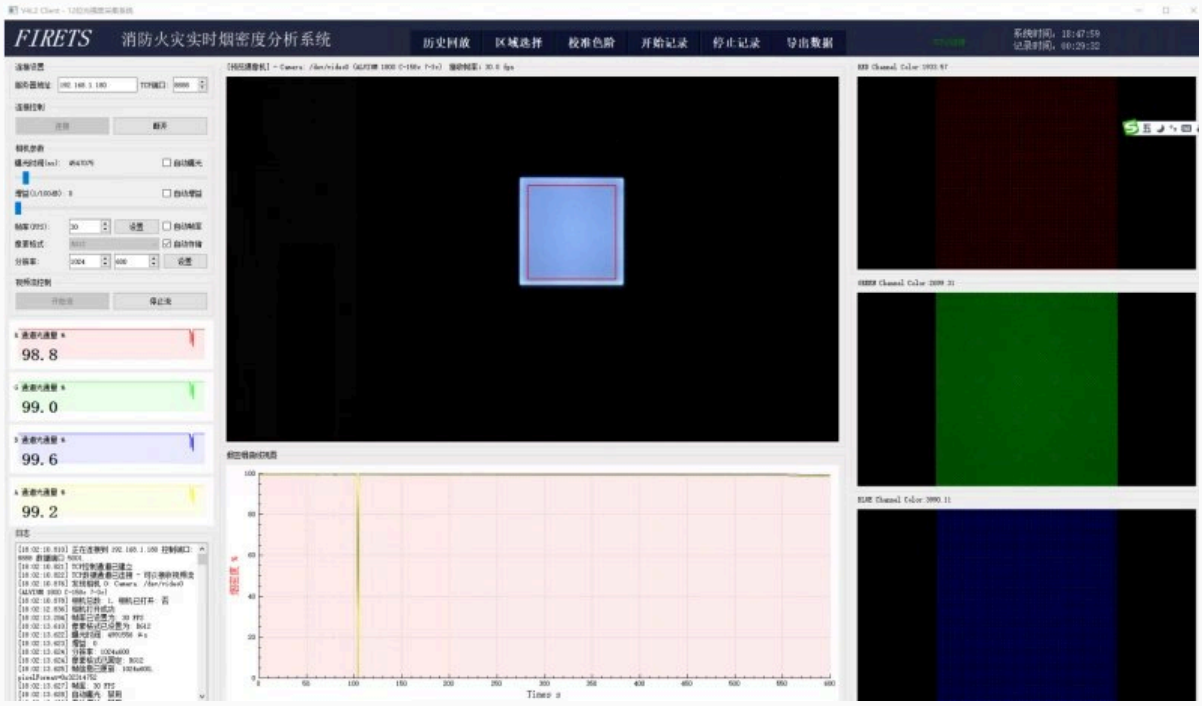

Original software screenshot. Displayed values are examples, not certified results.

What the screenshots show

These screenshots are original captures from the reviewed Chinese edition. They illustrate operating, recording or reporting functions available in that software. Displayed readings remain examples from the captured session.

How to read them

Keep the clean-air baseline, path length, alignment and window-condition record. Retain raw light or transmission values and document treatment of background light, saturation and obstruction.

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

UNCERTAINTY AND COMPARISON

Interpretation

Provide in-situ optical measurements for large-scale fire and smoke-extraction research.

Interpretation

Provide in-situ optical measurements for large-scale fire and smoke-extraction research. Transmitter and receiver units are installed at opposite ends of a defined path, linking changing light transmission with other temperature or velocity measurements.

Use in the laboratory

Keep the clean-air baseline, path length, alignment and window-condition record. Retain raw light or transmission values and document treatment of background light, saturation and obstruction.

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

REPORTING AND PROJECT SCOPE

Report Selection

Keep the clean-air baseline, path length, alignment and window-condition record.

Report Selection

Keep the clean-air baseline, path length, alignment and window-condition record. Retain raw light or transmission values and document treatment of background light, saturation and obstruction.




Original equipment photograph. Appearance only.

Use in the laboratory

Large test facilities, smoke movement studies and project-specific field measurement paths.

13 / REPORTING AND PROJECT SCOPE

Report Selection · continued

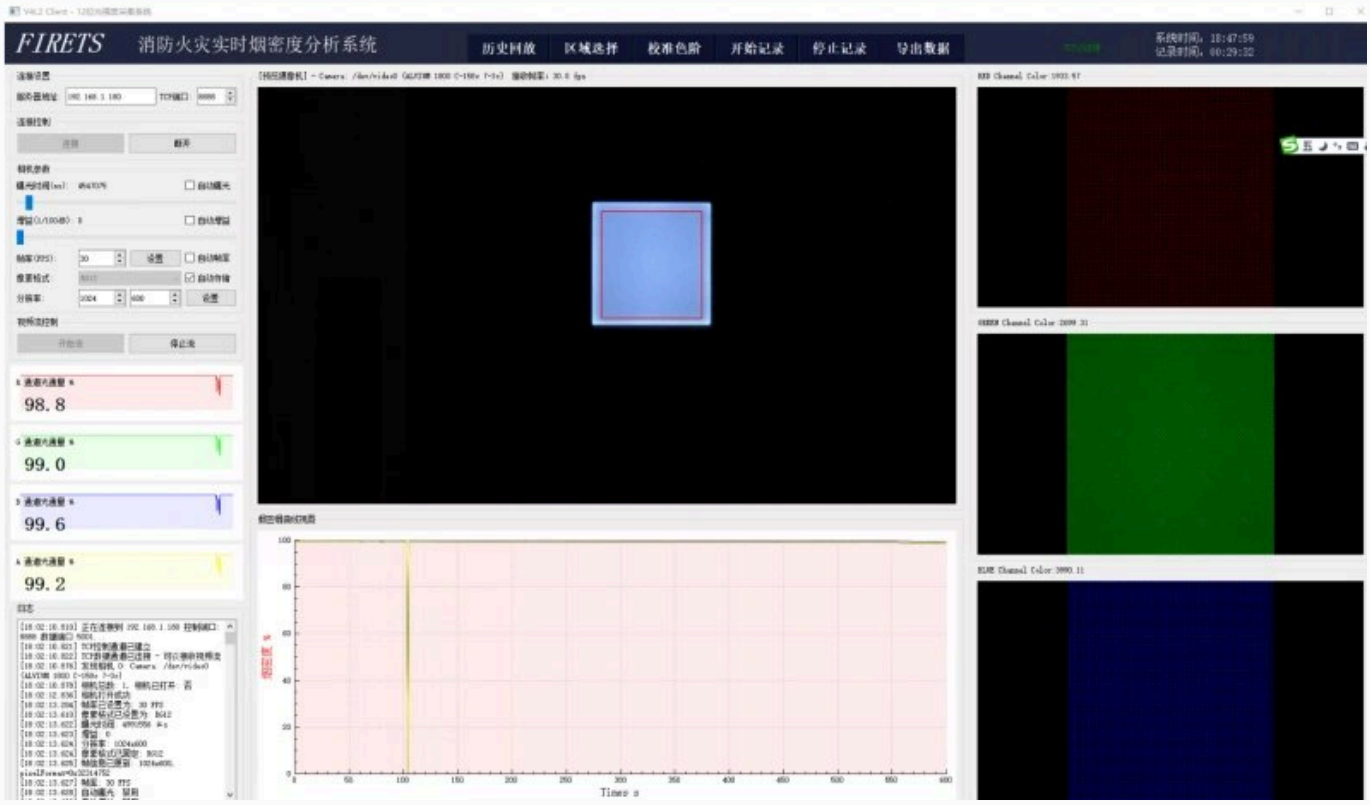

Original software screenshot. Displayed values are examples, not certified results.

English edition follows the reviewed Chinese manuscript evidence. Configuration and laboratory conditions follow the technical file confirmed by both parties. Unconfirmed numerical claims from the Chinese edition are not restated here.

14 / COMPANY

High-tech enterprise

Sichuan Farui Testing Equipment Co., Ltd. holds a High-tech Enterprise certificate. Its work covers fire-protection and material fire-test equipment, measurement and control software, and laboratory system integration.



Original High-tech Enterprise certificate. Dates and identifiers follow the certificate as issued.

Certificate number

GR202551000122

Issue date

2025.12.02

Stated validity

Three years

Issue date and validity are shown as stated on the certificate.

15 / COMPANY

Quality management system

From technical requirements through on-site use, Farui organises instrument development, assembly and service within the certified management-system scope, connecting requirement confirmation, technical implementation and project delivery.


注册号：30924Q0210R0S

质量管理体系认证证书

兹证明

四川法瑞检测设备有限公司

统一社会信用代码：91510703MA6Z473E4K

注册地址：绵阳市涪城区剑安路 35 号（科技城软件产业园）

审核地址：四川省绵阳市游仙区科学城中经路 52 号辅助房 12、13 号

质量管理体系 符合

GB/T19001-2016 idt ISO9001:2015 标准要求

该管理体系认证所覆盖的范围为：

工业自动控制系统仪器装置的研发、组装及服务

该组织分场所信息：

"无"

获证组织在证书有效期内每年至少接受一次本认证机构的监督审核，并将监督审核合格标志粘贴于证书指定位置，此证书方可持续有效。本证书有效性请登录 http://cx.cnca.cn 查询

颁证日期：2024 年 06 月 06 日　　有效期至：2027 年 06 月 05 日

国评认证（成都）有限公司

签发人：

地址：成都高新区[illegible]7 层 8 号

Original quality-management-system certificate. This is a company-system certificate, not product certification.

Certified standard

GB/T 19001-2016 / ISO 9001:2015

Certified scope

Research, assembly and service of industrial automatic-control system instruments

Registration number

30924Q0210R0S

Stated validity on the certificate

2024.06.06 — 2027.06.05

This page records the company management-system certificate. Coverage and current standing remain those registered by the certification body.

16 / COMPANY

Industry participation

As a senior member of the Smart Laboratory Professional Committee of the China Association for Standardization, Farui follows test standards and smart-laboratory practice, connecting industry exchange with instrument design, measurement and technical service.


会 员 证 书

兹批准 四川法瑞检测设备有限公司

为中国标准化协会智慧实验室专业委员会高级会员单位。

特发此证

发证日期： 2026 年 07 月 21 日

有效日期： 2027 年 07 月 20 日

编 号： CAS-D-260721-3182

发证机构： 中国标准化协会

Original senior-membership certificate of the Smart Laboratory Professional Committee.

Membership and organisation

Senior member, Smart Laboratory Professional Committee, China Association for Standardization

Issue date

2026.07.21

Stated validity on the certificate

2027.07.20

Membership is shown as registered on the original certificate and its stated validity date.

17 / COMPANY

Research and standards participation

Around flame retardancy, fire protection and measurement systems, Farui continues to accumulate instrument-design, automatic-control and test-method experience, using research and standards participation in technical discussion and system design for complex tests.

8 Invention patents (count)

4 Utility models (count)

4 GB/T participation (count)

From method to apparatus

Test conditions, measured quantities and use cases are translated into configuration options, with the test method as the starting point for technical discussion.

From signal to record

Data acquisition, control software and combined systems are organised so that original signals, operating conditions and reported results remain corresponding.

Figures follow the April 2026 company introduction. Patent applications are not distinguished from granted patents. Participation lists follow the corresponding documents.

CONTACT / FIRETS

Contact Farui

Discuss selection against the intended method, material and specimen form, measurement and reporting needs. Supply configuration and laboratory conditions follow the technical documents confirmed by both parties.

From the test need to the equipment configuration

Product selection / technical exchange

Project configuration / service enquiry

Connect on WeChat

Sichuan Farui Testing Equipment Co., Ltd.

18281912988 / lyping@firets.com

58 Zhongjing Road, Youxian District, Mianyang, Sichuan, China

www.firets.com